



## Impact of carbon-dosing on micro-pollutants removal in MBBR post-denitrification systems

Escola Casas, Monica; Torresi, Elena; Plósz, Benedek G.; Bester, Kai; Christensen, M.

*Publication date:*  
2015

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Escola Casas, M., Torresi, E., Plósz, B. G., Bester, K., & Christensen, M. (2015). *Impact of carbon-dosing on micro-pollutants removal in MBBR post-denitrification systems*. Abstract from 9th IWA Specialist Conference on Assessment and Control of Micropollutants and Hazardous Substances in Water, Singapore, Singapore.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Impact of carbon-dosing on micro-pollutants removal in MBBR post-denitrification systems

M. Escolà Casas<sup>1\*</sup>, E. Torresi<sup>2,3\*</sup>, B.G. Plósz<sup>3</sup>, K. Bester<sup>1</sup> and M. Christensen<sup>2</sup>

\*The authors equally contributed to this study

<sup>1</sup> Aarhus University, Dept. of Environmental Science, Roskilde, Denmark

<sup>2</sup> Veolia Water Technologies AB – AnoxKaldnes, Klosterängsvägen 11A, SE-226 47 Lund, Sweden

<sup>3</sup> Technical University of Denmark, Dept. of Environmental Engineering, Miljøvej 113, 2800 Kgs. Lyngby, Denmark

## Summary:

Dosing of methanol or ethanol is a common practice in post-denitrification steps during wastewater treatment by MBBR technology. The carbon-dosage impact on micro-pollutants removal, in terms of type (methanol or ethanol) and concentration was investigated. First, with continuous operation and indigenous micro-pollutants concentrations, different methanol and ethanol dosages were used to manipulate the carbon-to-nitrate ratio in two MBBRs. Atenolol, citalopram and trimethoprim were efficiently removed in both reactors. However, type or concentration of carbon did not correlate to micro-pollutant removal rates. Second, an anoxic-batch test with spiked micro-pollutants was conducted. The batch test showed that acetyl-sulfadiazine, atenolol, citalopram, propranolol and trimethoprim were easily removed in both reactors. Ibuprofen, clarithromycin, iopromide, metoprolol, iohexol, iomeprol, venlafaxine, erythromycin and sotalol were moderately removed while diatrizoic acid, iopamidol, carbamazepine and diclofenac showed to be hardly biodegradable. The fact that both reactors gave similar removal rate constants for easily degradable compounds, could suggest that diffusion through the biofilm determined the removal of such compounds. In contrast, for moderately degraded micro-pollutants, the biofilm developed under methanol dosing presented the highest removal rate constants. This might mean that the primary metabolism of methanol improved the metabolism of these micro-pollutants. In general, post-denitrification with methanol or ethanol gave high and consistent removals of micro-pollutants.

**Keywords:** MBBR, denitrification rate, pharmaceutical removal

## Introduction

Moving Bed Biofilm Reactor (MBBR) is a cost-effective solution for upgrading wastewater treatment systems (Mases et al., 2010, Jardin et al., 2000). Methanol and ethanol are common additional carbon sources used in post-denitrification systems as electron donors for the reduction of nitrate to nitrogen gas under anoxic conditions. The carbon-to-nitrate ratio (COD/NO<sub>3</sub><sup>-</sup>-N ratio) is an important parameter for denitrification and, generally, it is optimal around 4 (Metcalf & Eddy, 2003). Although methanol is the most used carbon source for denitrification, ethanol can result in a more readily available carbon source than methanol, leading to higher denitrification rates (Foresti et al., 2004; Christensson et al., 1994). Pre-denitrification MBBRs showed comparable or higher removal of micro-pollutants than aerobic activated sludge (Polesel et al., in preparation). We hypothesized that due to different type of the carbon sources (methanol and ethanol) microbial community can specialize its primary metabolism (i.e. denitrification) and, as a consequence, the metabolism of micro-pollutants. Also, the metabolism of micro-pollutants could be influenced by the carbon concentration. Therefore, the present study investigated the post-denitrification dynamics for nitrogen, carbon and micro-pollutants removal.

## Materials and Methods


Two laboratory-scale MBBRs (1L) were operated in parallel simulating the post-denitrification stages of two wastewater treatment plants (WWTPs) where methanol (WWTP 1) or ethanol (WWTP 2) is used as carbon source. Both MBBRs had a filling rate of 40%. The reactors were fed

with trickling-filter effluent from WWTP 1 and methanol or ethanol were dosed as a dilution in distilled water. Both systems operated with a hydraulic retention time of 2 hours and using indigenous concentration of nitrate and micro-pollutants. The COD/NO<sub>3</sub><sup>-</sup>-N ratio was manipulated by changing methanol or ethanol dilution. The MBBRs were always flushed with nitrogen and stirred to mix and to ensure an anoxic system. After 4 months operation, a batch test with spiked micro-pollutants was performed to determine the degradation kinetics of micro-pollutants in the reactors.

## Results and Conclusions

The denitrification rates increased proportionally to the COD/NO<sub>3</sub><sup>-</sup>-N ratio as expected. In continuous operation atenolol, citalopram and trimethoprim were efficiently removed in both reactors, with removal percentages from 56 to 98%, 17 to 53% and 30 to 100 % respectively. The removal rate of micro-pollutants did not correlate to the COD/NO<sub>3</sub><sup>-</sup>-N ratio or the carbon type, indicating that the removal mechanism of such compounds might not be dependent on the primary substrate availability.

The batch test assessed the biodegradation potential of selected micro-pollutants in the MBBRs. The data was fitted to first order kinetics and the removal rate constants normalized to the amount of biomass ( $k_{bio}$ ) (Figure 1). WWTP 1 and WWTP 2 biomasses appeared to degrade acetyl-sulfadiazine, atenolol, citalopram, propranolol with similar and high removal rate constants, indicating that these reactions may be limited by diffusion through biofilm surface. The compounds removed with lower  $k_{bio}$  were degraded more efficiently by the WWTP 1 biomass, indicating that methanol shaped a more efficient biofilm community in that reactor. In conclusion, this study demonstrates that wastewater treatment plants could be potentially optimized to enhance micro-pollutants removal by modifying or adding the post-denitrification stage.

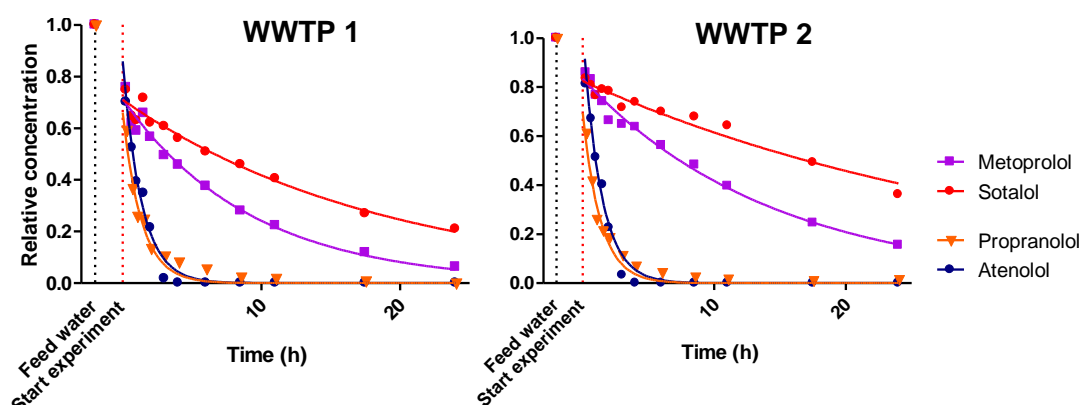

**Figure 1:** Batch data from four pharmaceuticals (beta-blockers). The curves correspond to first order kinetics fitting

## References

- Christensson, M.; LIE, E.; Welandar, T. (1994). A comparison between ethanol and methanol as carbon sources for denitrification, *Water science and technology*, 30 (6), 83-90.
- Foresti E. Gavazza S dos Santos, Bernadete Amâncio Varesche M., Zaiat M., (2004). Comparison of methanol, ethanol, and methane as electron donors for denitrification, *Environmental engineering science*, 21 (3). 313-330.
- Jardin N., Rath L, Sabin A., Schmitt F., Thöle D. and Kühn S. (2000). Cost-effective upgrading of the Arnsberg WWTP by post denitrification with a moving bed system, *Water science and Technology* , 41 (9), 123-130.
- Metcalf & Eddy., Tchobanoglous, G., Burton, F. L.& Stensel, H. D. (2003). Wastewater engineering: Treatment and reuse (4th ed.). Boston: McGraw-Hill.
- Polesel, F., Torresi, E., Loreggian, L., Escolà Casas, M., Bester, K., Plósz, B.G., in preparation. Pharmaceutical removal in single- and three-stage pre-denitrifying MBBR.